





SERIE 205

TIPO 20-24-700 / 20-26-600

MONTAGGIO IDRAULICO SUPERAUTOMATICO
SELF-ERECTING HYDRAULIC TOWER CRANE
GRUE A TOUR HYDRAULIQUE A MONTAGE RAPIDE
HYDRAULISCHER TURMDREHKRAN MIT SCHNELLMONTAGE
GRUA AUTOMONTANTE HIDRAULICA DE MONTAJE RAPIDO

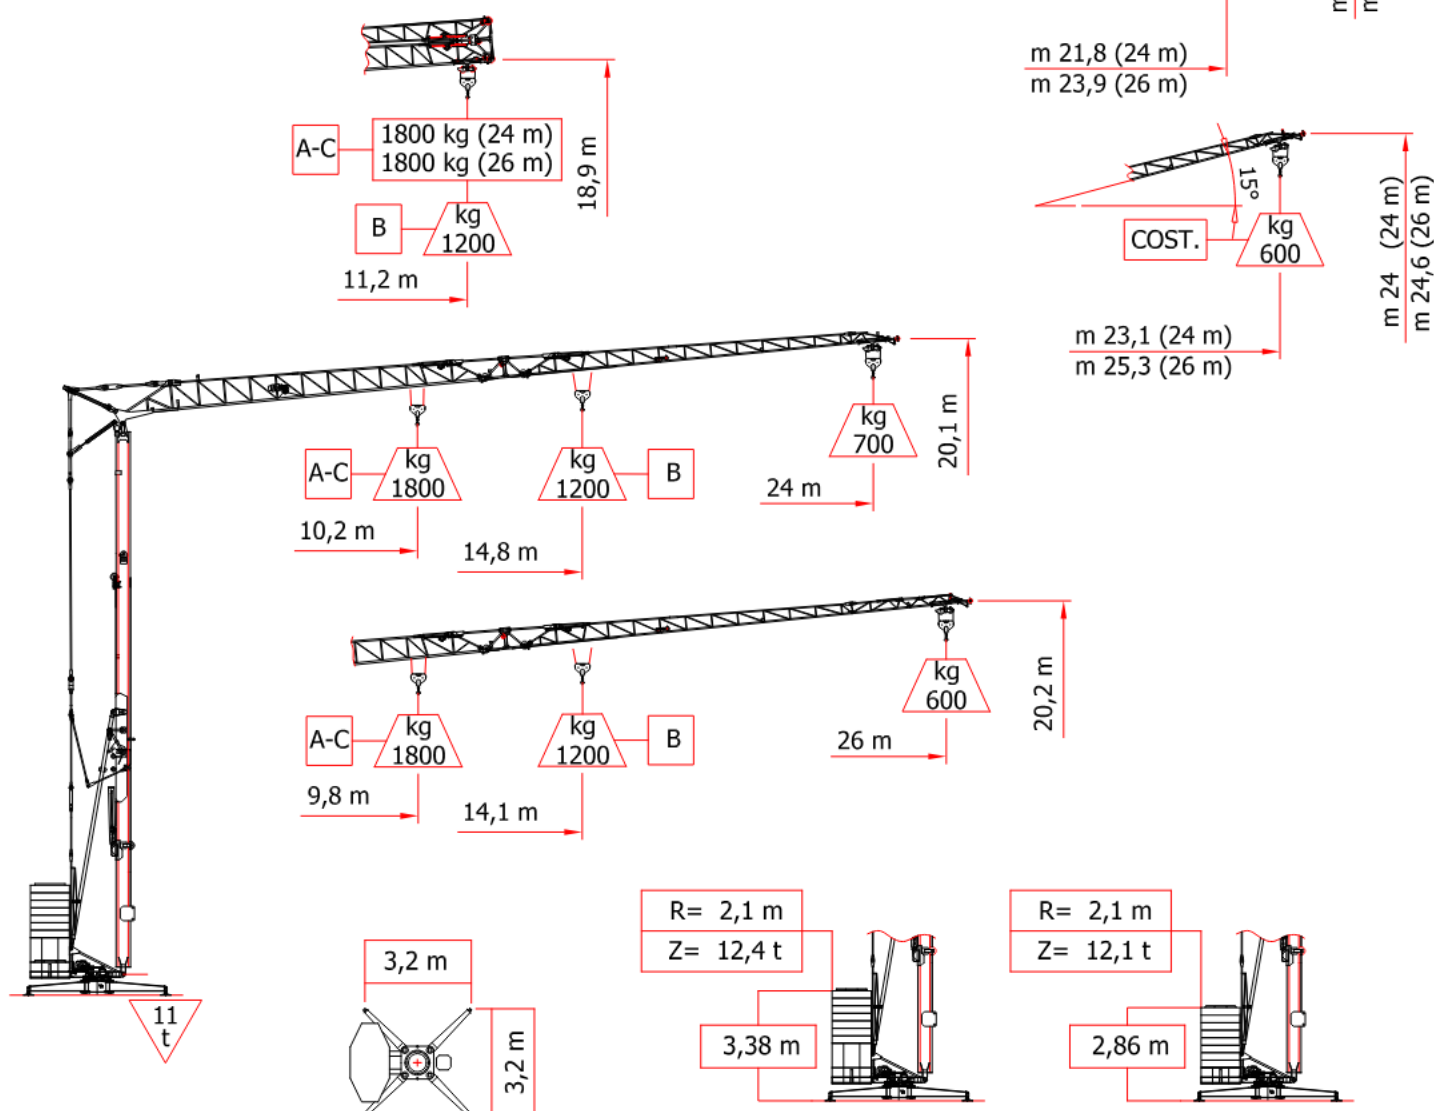

BRACCIO 24 m			10,2	12	13	14,8	17	19	21	23	24	
kg		A-C	1800	1525	1395	1200	1030	910	815	735	700	
		B	1200	1200	1200	1200	1030	910	815	735	700	
BRACCIO 26 m			9,8	12	13	14,1	17	19	21	23	24	26
kg		A-C	1800	1438	1315	1200	970	860	765	690	660	600
		B	1200	1200	1200	1200	970	860	765	690	660	600

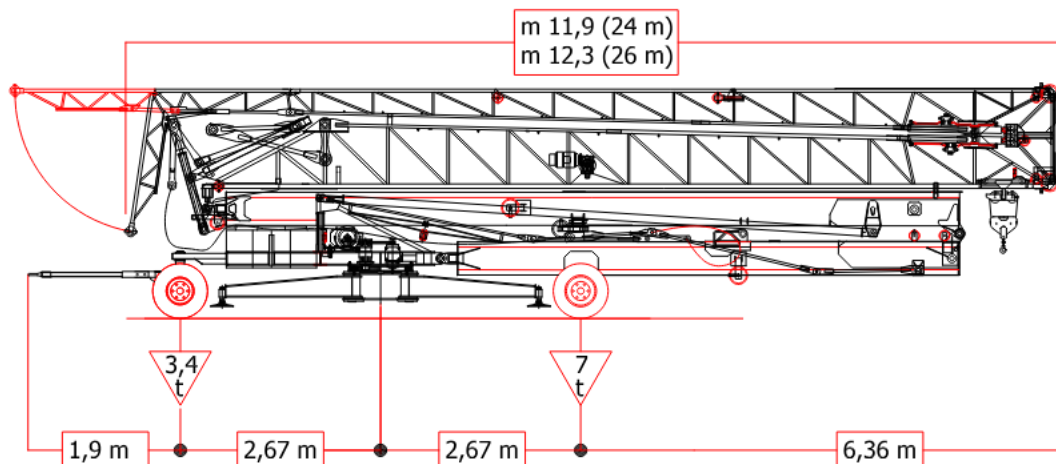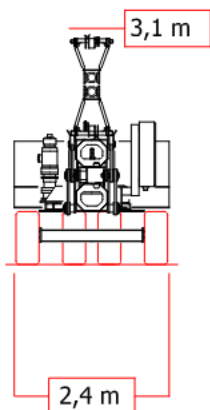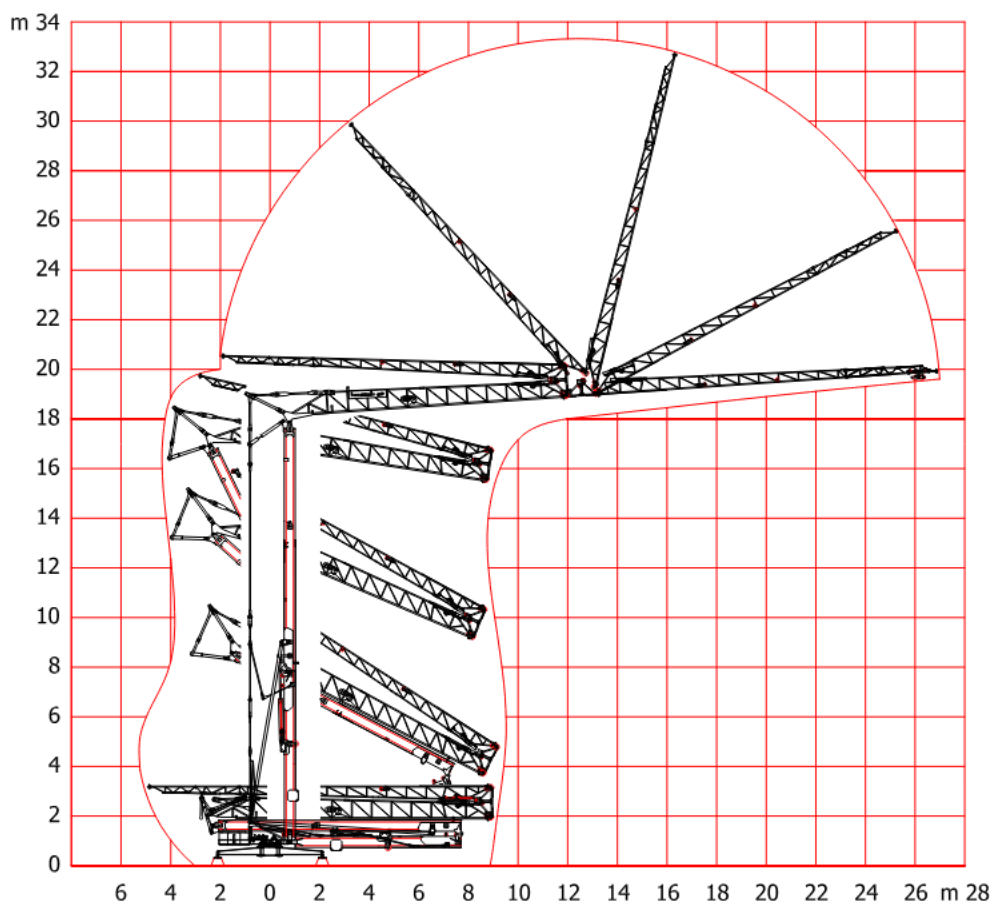

DIN 15018	H ₁	B ₂	B ₃	DIN 15019	
	TRIFASE	m/min 27-900	kg	kW 4,4	A
		m/min 13,5-1800	kg	kW 4,4	
		m/min 3,5-1800	kg	kW 1,1	
	MONOTRIFASE (INVERTER)	m/min 20-600	kg	kW 4,5	B
		m/min 14-800	kg	kW 4,5	
		m/min 8-1200	kg	kW 4,5	
	MONOTRIFASE (INVERTER)	m/min 25-600	kg	kW 4,5	C
		m/min 17-800	kg	kW 4,5	
		m/min 8-1800	kg	kW 4,5	

	rpm	0-1	daNm 1,5
--	-----	-----	----------

	m/min	25-1800 kg	kW 1,5
--	-------	------------	--------

A V 400 Hz 50 MAX POWER kVA 7,5	B V 230 Hz 50 MAX POWER kVA 3	C V 230/400 Hz 50 MAX POWER kVA 6
--	--	--

Torre in tubo ottagonale
Crane with octagonal closed beam tower
Grue avec mat en tube octogonal
Kran mit oktagonalem Rohrturm
Torre de tubo octogonal

Riserva di mofifiche - Subject to modifications - Modifications reservées - Aenderungen vorbehalten - Reserva de modificaciones