

SERIE 102 DS

TIPO 18-22-600 / 18-24-500

TRIFASE - MONOFASE


MONTAGGIO IDRAULICO SUPERAUTOMATICO

SELF-ERECTING HYDRAULIC TOWER CRANE

GRUE A TOUR HYDRAULIQUE A MONTAGE RAPIDE






HYDRAULISCHER TURMDREHKRAN MIT SCHNELLMONTAGE

GRUA AUTOMONTANTE HIDRAULICA DE MONTAJE RAPIDO

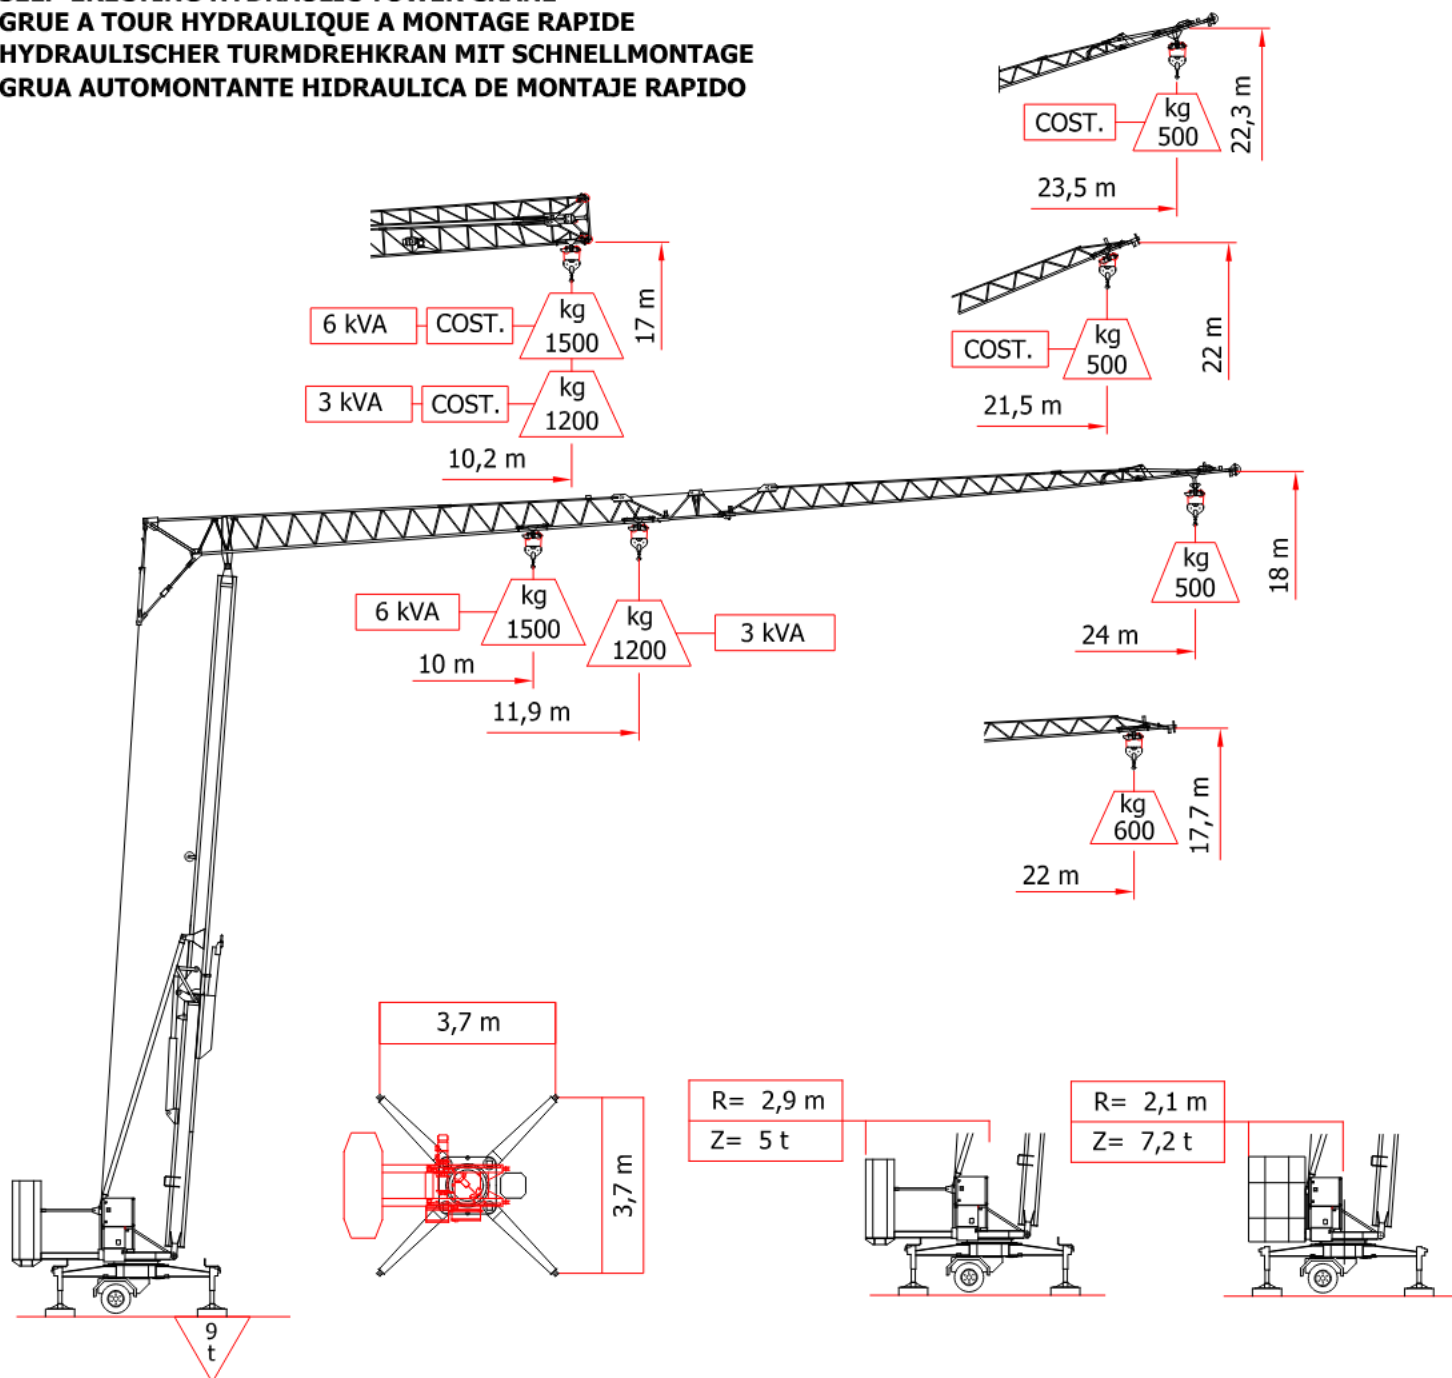

10,5	11	12	12,5	13	14	15	16	17	18	19	20	21	22		
3 kVA	1200	1200	1200	1150	1050	960	885	825	765	720	675	635	600		
6 kVA	1500	1420	1270	1200	1150	1050	960	885	825	765	720	675	635	600	

10	11	11,9	12	13	14	15	16	17	18	19	20	21	22	23	24
3 kVA	1200	1200	1200	1185	1070	975	895	825	765	715	668	630	590	560	530
6 kVA	1500	1325	1200	1185	1070	975	895	825	765	715	668	630	590	560	530

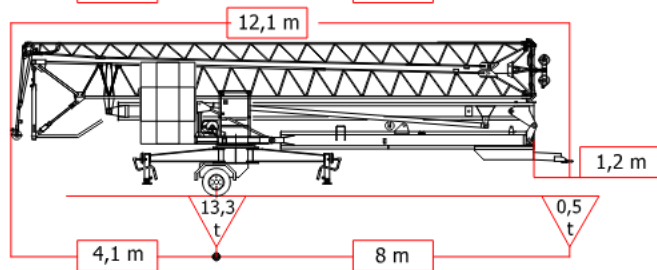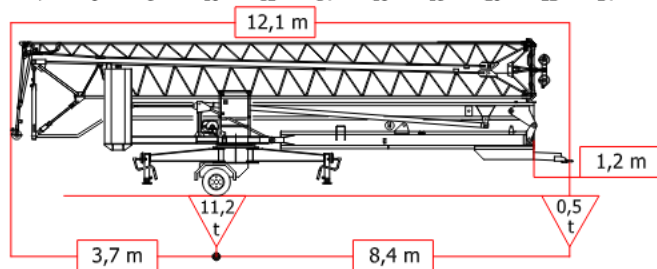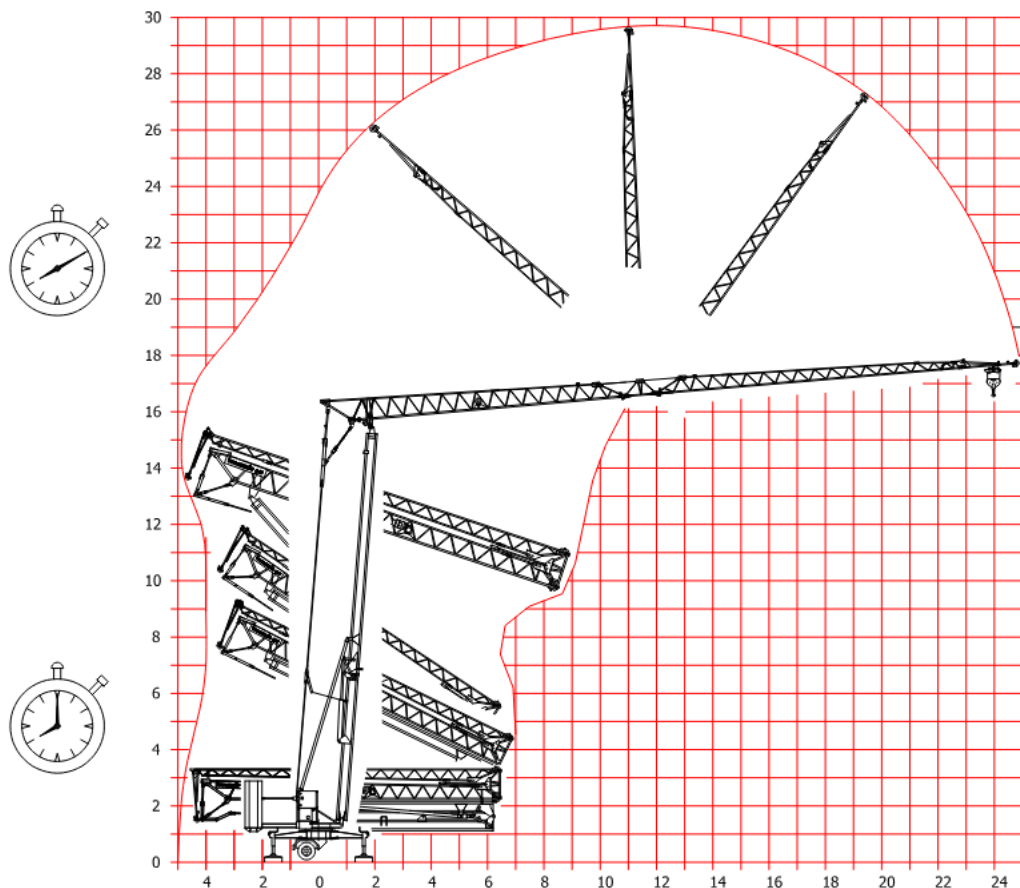

DIN 15018	H ₁	B ₂	B ₃	DIN 15019		TRIFASE TRIFASICA TRIPHASEE THREE-PHASE DREHSTROM	MONOFASE MONOFASICA MONOPHASEC ONE-PHASE WECHSELSTROM
▲ ▼	INVERTER m/min 20 - 600 kg m/min 14 - 800 kg m/min 8 - 1200 kg			kW 4,5	MAX. POWER kVA 3	V 400	V 230
▲ ▼	INVERTER m/min 25 - 600 kg m/min 17 - 800 kg m/min 8 - 1500 kg			kW 4,5	MAX. POWER kVA 6	Hz 50	Hz 50
↺ ↻	rpm 0 - 0,9			daNm 1,5		MAX. POWER kVA 6	MAX. POWER kVA 3 / 6
◀ ▶	m/min 25-1500 kg			kW 1,5			

Torre in tubo ottagonale
Crane with octagonal closed beam tower
Grue avec mat en tube octogonal
Kran mit oktagonalem Rohrturm
Torre de tubo octogonal

Riserva di modifiche - Subject to modifications - Modifications reservées - Aenderungen vorbehalten - Reserva de modificaciones