

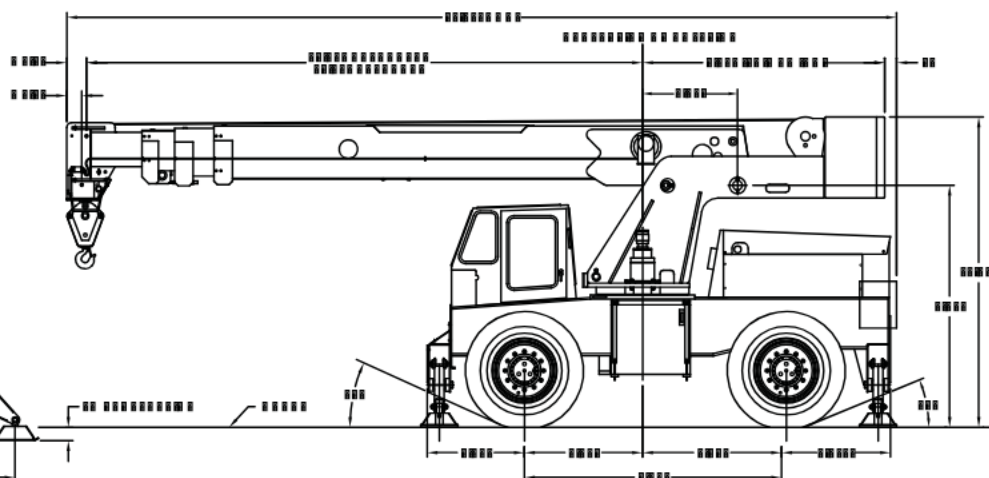
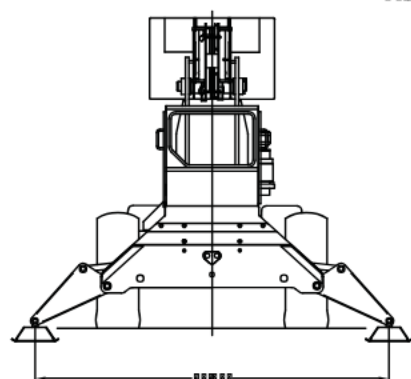
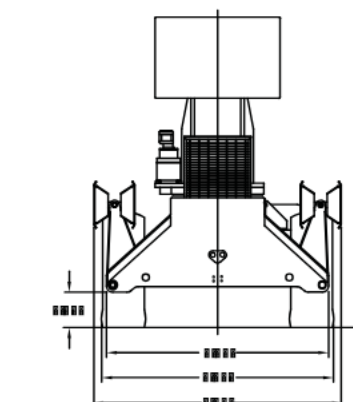


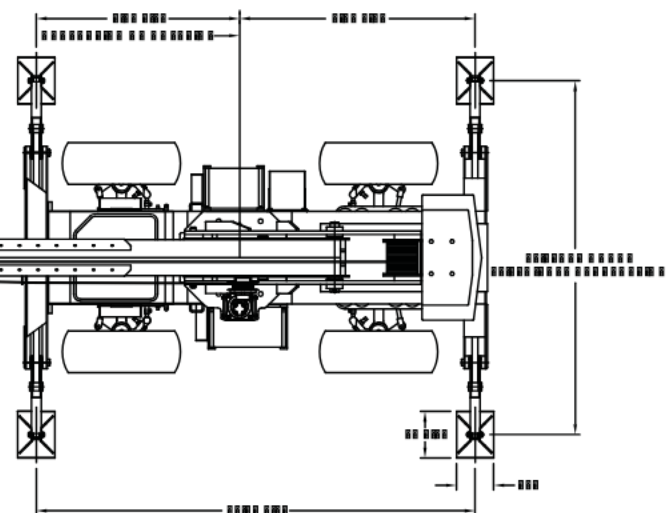

- BRODERSON®**
A BROADBENT COMPANY

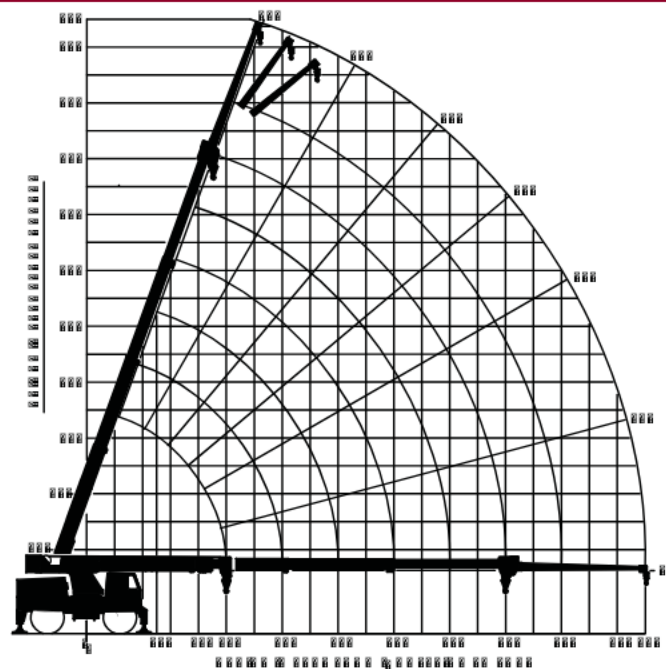

[illegible][illegible]

RT-300-2E

Specifications

General Description

The RT-300-2E is a high-performance, multi-channel signal processing unit designed for use in a variety of applications, including audio processing, data acquisition, and control systems.

It features a rugged, industrial-grade design with a wide operating temperature range and high reliability.

The unit is available in two configurations: a single-channel version and a dual-channel version.

The single-channel version is designed for use in applications where a single signal path is required.

The dual-channel version is designed for use in applications where two signal paths are required.

The unit is designed to be mounted in a standard 19-inch rack.

The unit is designed to be used in a variety of environments, including industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

The unit is designed to be used in a variety of environments, including:

Industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

The unit is designed to be used in a variety of environments, including:

Industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

The unit is designed to be used in a variety of environments, including:

Industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

The unit is designed to be used in a variety of environments, including:

Industrial, commercial, and military.

Features

The RT-300-2E features a wide range of features, including:

High-performance signal processing, rugged industrial design, and wide operating temperature range.

The unit is designed to be used in a variety of environments, including industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

The unit is designed to be used in a variety of environments, including:

Industrial, commercial, and military.

Performance Characteristics

The RT-300-2E is designed to provide high-performance signal processing in a variety of environments, including industrial, commercial, and military.

Applications

The RT-300-2E is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

Environmental Specifications

The RT-300-2E is designed to be used in a variety of environments, including industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

Physical Specifications

The RT-300-2E is designed to be used in a variety of environments, including industrial, commercial, and military. The unit is designed to be used in a variety of applications, including:

Ordering Information

The RT-300-2E is available in two configurations: a single-channel version and a dual-channel version.

Warranty Information

The RT-300-2E is covered by a three-year warranty.

The warranty covers the unit against defects in materials and workmanship.

The warranty does not cover damage caused by misuse or abuse of the unit.

The warranty does not cover damage caused by fire or theft.

Technical Support and Training

The RT-300-2E is supported by a team of technical experts who can provide assistance with installation, operation, and troubleshooting.

The unit is also covered by a comprehensive training program.

Installation and Operation

The RT-300-2E is designed to be installed in a standard 19-inch rack.

The unit is designed to be used in a variety of environments, including industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

The unit is designed to be used in a variety of environments, including:

Industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

Accessories and Options

The RT-300-2E is available with a variety of accessories and options, including:

Technical Specifications

The RT-300-2E is designed to provide high-performance signal processing in a variety of environments, including industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

The unit is designed to be used in a variety of environments, including:

Industrial, commercial, and military.

The RT-300-2E is designed to provide high-performance signal processing in a variety of environments, including industrial, commercial, and military. The unit is designed to be used in a variety of applications, including:

Performance Characteristics

The RT-300-2E is designed to provide high-performance signal processing in a variety of environments, including industrial, commercial, and military. The unit is designed to be used in a variety of applications, including:

Physical Specifications

The RT-300-2E is designed to be used in a variety of environments, including industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

The unit is designed to be used in a variety of environments, including:

Industrial, commercial, and military.

The unit is designed to be used in a variety of applications, including:

Audio processing, data acquisition, control systems, and signal processing.

The unit is designed to be used in a variety of environments, including:

Industrial, commercial, and military.

Ordering Information

The RT-300-2E is available in two configurations: a single-channel version and a dual-channel version.

Warranty Information

The RT-300-2E is covered by a three-year warranty. The warranty covers the unit against defects in materials and workmanship.

Technical Support and Training

The RT-300-2E is supported by a team of technical experts who can provide assistance with installation, operation, and troubleshooting. The unit is also covered by a comprehensive training program.

