

**Small in size with
big crane features**

- Rated Capacity Limiter ... Standard
- Capacity on Outriggers ... 8,000 lbs.
- Pick and Carry Capacity ... 6,700 lbs.
- Height ... 6' 6"
- Width ... 5'
- Boom Rotation ... 360 Degree, Continuous
- Sheave Height ... up to 33'
- Horizontal Reach ... up to 27'
- Tight Turning Radius
- Rear Wheel Steer ... Standard
- Front Wheel Drive ... Standard
- Fully Hydraulic Controls for Smooth Precise Operations
- Independent Outrigger Controls
- Dual Fuel Standard, Diesel Optional



DMC[®] BRODERSON[®]
Manufacturing Corp.

P.O. Box 14770, Lenexa, KS 66285-4770
(913) 888-0606 • FAX (913) 888-8431
website: bmccranes.com

IC-35-D

CAPACITIES APPLY TO OPERATION ON FIRM LEVEL SURFACE				
LOAD RADIUS FEET	MAIN BOOM OR EXTENSION CAPACITIES IN POUNDS			
	360° ROTATION		OVER FRONT	
	ON RUBBER	ON OUTRIGGERS	ON RUBBER	ON OUTRIGGERS
MAIN BOOM	4	5000	8000	6700
	5	4000	6800	5800
	6	2850	5850	5100
	8	1800	4150	3500
	10	1250	3200	2350
	12	900	2350	1750
	14	700	1850	1350
	16	600	1500	1100
	18	500	1250	950
	19	450	1150	900
8' BOOM EXTENSION	20	400	1100	850
	22	300	900	700
	24	250	800	600
	26	200	700	500
	27	150	650	450
	8-FOOT BOOM EXTENSION - STRAIGHT OR OFFSET			
	MAIN BOOM ANGLE			
	ANGLE	0°	10°	20°
		30°	40°	50°
		60°	70°	
	* 0°	1100	1200	1300
	* 15°	—	—	—
	* 30°	—	—	—




+ USE 0° FOR STRAIGHT BOOM EXTENSION.

* USE 0°, 15° OR 30° FOR OFFSET BOOM EXTENSION.

BOOM EXTENSION LOADS MUST NOT EXCEED MAIN BOOM CAPACITY.

CAPACITIES ON OUTRIGGERS ARE 85% OF TIPPING LOADS. CAPACITIES ON RUBBER ARE 75% OF TIPPING LOADS. CAPACITIES BELOW BOLDLINE ARE LIMITED BY TIPPING. OTHER CAPACITIES ARE LIMITED BY STRUCTURAL OR HYDRAULIC CAPABILITIES.

CAUTION: BOOM EXTENSION LOADS MUST NOT EXCEED MAIN BOOM CAPACITY. BOOM EXTENSION DEDUCT: 100 LBS. WHEN STOWED ON BASE BOOM, 300 LBS. IN WORK POSITION WITH LOAD ON MAIN BOOM.

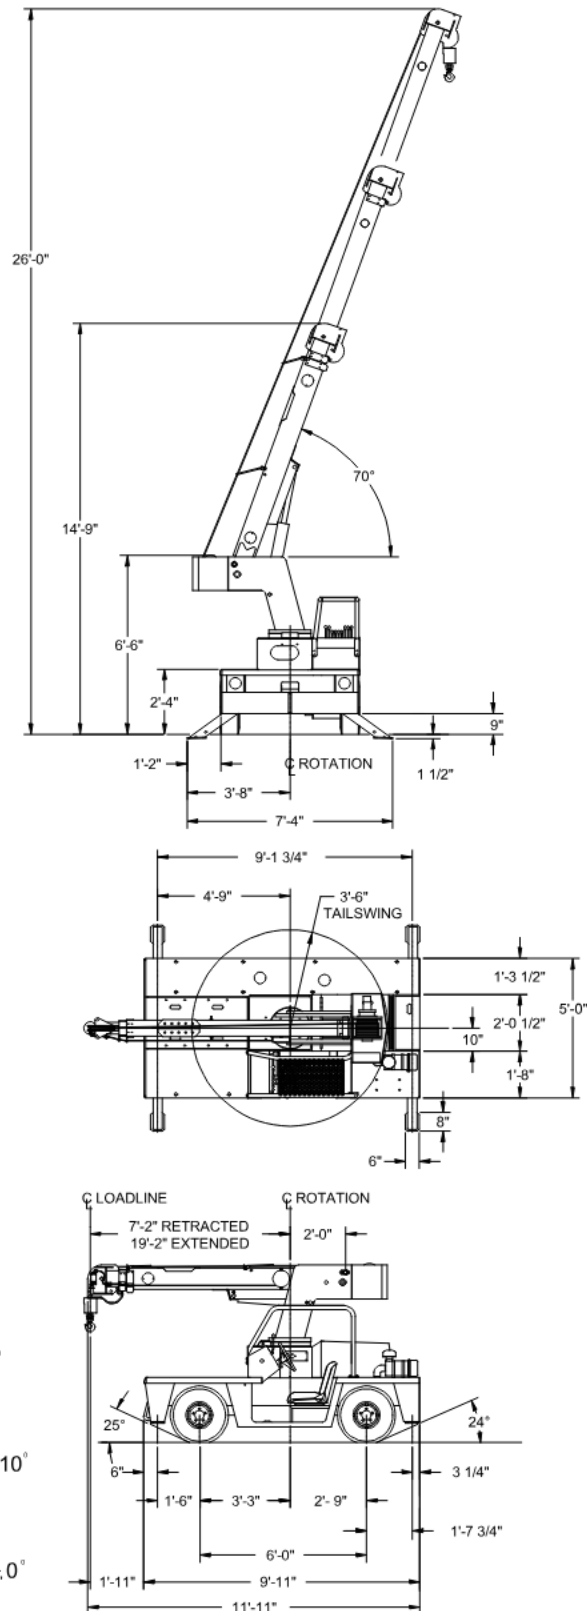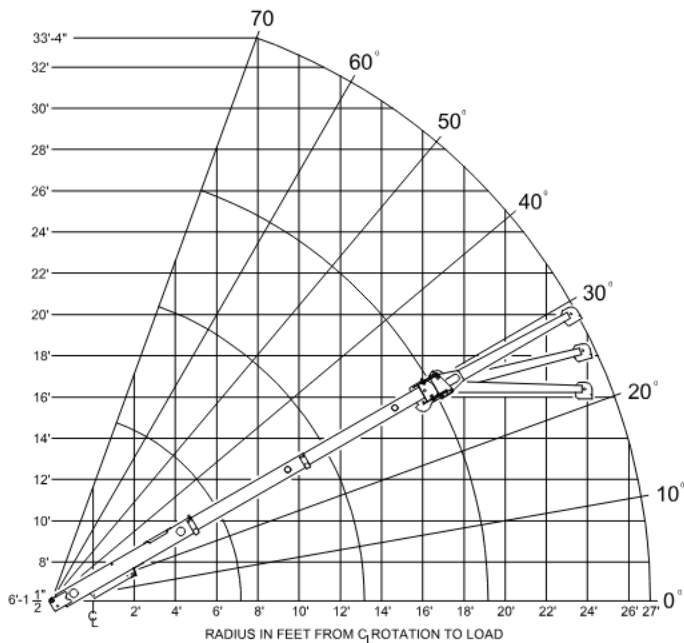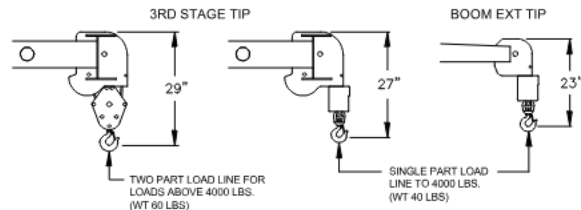

General:

Weight	7,660 lbs.
Travel Speed	0 to 10 mph
Drawbar Pull	2,400 lbs.
Gradeability	30% (16 degrees)
Boom Movements:	
Rotation	Continuous Rotation
Elevation	0 to 70 degrees
Extension	7 ft. 2 in. to 19 ft. 2 in.
Boom Speeds:	
Rotation	1.4 RPM
Elevation	20 seconds
Extension	38 seconds

Engine:	Standard	Optional
Make	Nissan	Cummins
Model	H20	A2300
Type	Dual Fuel	Diesel
Cylinders	4	4
Displacement	121 CID	140 CID
HP @ Governed speed	51 HP	50 HP
Fuel Tank Capacity	13.5 Gallons	33 lb. aluminum LPG tank

Hydrostatic Pump:

Piston type, direct driven from engine crankshaft. Maximum flow 34 GPM, maximum pressure 4,000 PSI.

Axles:

Front Drive Axle:

Channel shaped structure houses torque hubs, brakes & hydraulic drive motors. Axle oscillates a total of 1-1/2".

Rear Steering Axle:

Fixed rigid to frame.

Steering:

Full hydraulic steering unit controls 2-1/2" steering cylinder attached to rear axle.

Brakes:

Primary braking from hydrostatic transmission. Foot-actuated disc brake attached into each torque hub for additional braking in some conditions. Parking brake switch locks brakes to hold crane when not being driven.

Tires:

Front - 7.5 x 10 pneumatic, 16-ply rating.
Rear - 7.5 x 10 pneumatic, 16-ply rating.

Chassis:

Cargo Deck:

29 square feet deck area, 6,000 pounds capacity when centered over front axle or to the rear of front axle.

Outriggers:

Four hydraulic outriggers of box-beam construction. Independent controls for each. Hydraulic cylinders are equipped with direct-connected holding valves.

Chassis: (Cont'd)

Lifting Rings:

Consists of four rings, one at each corner of the load deck.

Pulling Eye:

Mounted on front bumper.

Operator's Compartment

Provides one-position access to all chassis and crane functions. Includes adjustable operator's seat, retracting seat belt, fire extinguisher and bubble level.

Electrical System:

12 Volt System

Lighting Group: One pair headlights and taillights.

Instrument Group:

Fuel, ammeter, oil pressure, water temperature, hydrostatic oil temperature gauges & hourmeter. Gauges are lighted.

Outtrigger Alarm System

Two-tone alarm is activated when "Outtrigger Down" controls are operated.

Back-Up Alarm:

Provides pulsating 97 decibel sound when transmission is in reverse.

Hydraulic System:

Tandem pump mounted to rear of hydrostatic piston pump. Delivers 6 GPM at 2,600 PSI for boom circuits & 18 GPM at 2,250 PSI for hoist circuit. System protected by relief valves. Hydraulic oil tank has 14 gallons capacity. Hydraulic oil cooler provided.

Boom:

Boom Assembly:

Three-section boom assembly equipped with bearing pads, double-acting hydraulic cylinders equipped with direct-connected holding valve and boom angle indicators on each side of boom.

Boom Rotation:

Heavy-duty ball bearing rotation gear with external teeth. Rotation is powered by hydraulic motor & worm gear drive.

Boom Hoist:

Turret-mounted, planetary gear hoist, hydraulically powered with bare drum line pull of 4,600 lbs. and a line speed of 86 FPM. Hoist includes 85 ft. of 3/8 in. wire rope, downhaul weight, swivel hook and sheave block for 2-part line.

Anti Two-Block Device:

Prevents damage to hoist rope and/or crane components. Dumps hydraulic flow for Hoist Raise, Telescope Extend and Boom Lower.

Sheave Block

Single sheave block for 2-part line requirements.

Rated Capacity Limiter:

Warns operator of impending overload with audible and visual signals. Prevents overload by stopping boom functions that cause overloads.

IC-35-D

Listed below are brief descriptions of each option available for the IC-35-2D Industrial Crane.
Consult the IC-35-2D Engineering Spec for additional information on each option.

IC-35-2D, 4-Ton Industrial Crane with Gas Engine.

Engine Options:

Cummins 2.3L Diesel Engine

Cummins Model A2300, CARB
Tier II and EPA Tier II Certified.

Spark Arrester Muffler

Installed in addition to
standard muffler.

Engine Shut Down Gauges

Shuts engine off when high water
temperature or low engine oil
pressure occurs. Diesel only.

Tire Option:

Solid Rubber Tires

For applications where hazardous
ground conditions exist.

Non-Marking Solid Rubber Tires

Foam Filling of Tires

Spare Tire & Wheel

7.50 x 10, 16-ply (Specify front
or rear).

Chassis Options:

Auxiliary Winch

Mounted behind front bumper,
hydraulically driven with control in
operator's console (3,000 lbs. @
20 FPM).

Pintle Hook - Rear

Holland "T-60-A" pintle hook
mounted on rear of frame.
5-ton capacity.

Lifting Sling

Sling to attach to Lifting Rings.

Headlight & Taillight Grilles

Welded steel protective grilles for
headlights and taillights.

Operator Compartment Options:

All Weather Cab

Rigid-mounted canopy section and
removable hinged door. Cab door
adds 4 inches to crane width.
Includes heater, windshield wiper,
defroster fan, dome light & sliding
window in door. Cannot be used
with Operator Guard.

Cab Heater

Heater with two-speed fan, for units
without All Weather Cab.

Operator Guard

Tubular steel weldment with heavy
expanded steel mesh top section.

Operator Guard Cover

Clear vinyl cover to go over
Operator Guard, for inclement
weather.

Floor Mat:

Vinyl mat with foam backing.

Electrical Options:

Strobe Lights

Two yellow strobe lights mounted
to turntable.

Boom Work Lights

One work light mounted to boom to
light boom tip and one work light
mounted to turret to light ground
under boom tip.

Wire Rope:

140 ft. of 3/8 in. dia. wire rope.

Boom Attachment Options:

Boom Extension

8 foot, boom stowable.

Boom Extension, Offset

8 foot, boom stowable, the boom
extension is offsettable to 3 different
positions. 0 degree (inline),
15 degree and 30 degree offset.

Searcher Hook

2,000 pound capacity. Swivel hook
with spring latch hangs from support
structure projecting outward from
boom tip.

**Should you, as the end user, require
an option or special equipment on
your IC-35-2D that is not listed on
our sales literature, please contact
your dealer sales-person or the
factory to receive a special quoted
price.**

 **BRODERSON[®]**
Manufacturing Corp.
P.O. Box 14770, Lenexa, KS 66285-4770
(913) 888-0606 • FAX (913) 888-8431
website: bmccranes.com